


MOTOR CONNECTOR IS JST mod. B6B-EH K 6 POLES MALE.
FOR CONNECTION USE JST mod. EHR-6 FEMALE CONNECTOR AND mod. SEH-001T-P0.6 CONTACTS.
NOTE: 103-H5210-4240 MOTORS NEED CVM103H5230 R.T.A. CABLES. CONTACT R.T.A. FOR FURTHER DETAILS.

Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	103 - H5210 - 4240
BASIC STEP ANGLE			$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT	(Amp)		1.0
UNIPOLAR CURRENT	(Amp)		
RESISTANCE	(Ohm)		4.8
INDUCTANCE	(mH)		9.5
BIPOLAR HOLDING TORQUE	(Ncm)		51
UNIPOLAR HOLDING TORQUE	(Ncm)		
ROTOR INERTIA	(Kgm ² x 10 ⁻⁷)		74
THEORETICAL ACCELERATION	(rad x sec. ⁻²)		69000
BACK E.M.F.	(V/Krpm)		14
MASS	(Kg)		0.35
LEADS CODE			V

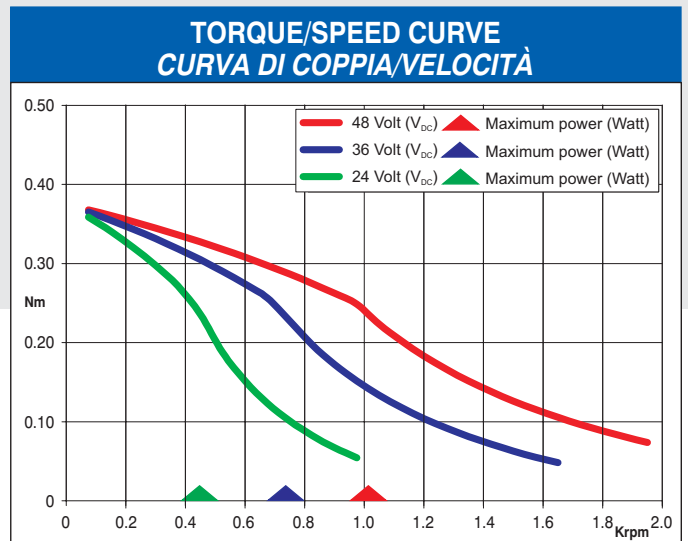

Suggested R.T.A. driver: CSD Series, NDC Series, HGD Series.